RR EC 315




SVR EC 315




SlimVent – Slimline EC space saver w/ retractable motor-impeller unit.

Dimensions RR EC 315



Dim. in mm

Dimensions SVR EC 315



Dim. in mm

Energy-saving EC circular duct fans for the delivery medium and small air volumes against high resistances.
Specifically designed for direct insertion in duct systems. High pressure performance for overcoming friction losses, deflection losses and aggregate resistances.
For various applications in commercial, industrial and residential areas.

Special features

- ☐ Highly efficient EC motor for low operating costs.
- ☐ Low space requirement and installation costs due to linear throughflow.
- ☐ No need for elaborate deflectors.
- ☐ Connectors on inlet and outlet side correspond to standard duct Ø.
- ☐ Performance adjustment through 100% speed control.
- ☐ Can be used in any position.
- ☐ Wide range of accessories.
- ☐ Aerodynamically optimised casing design.

Common features RR EC and SVR EC

Drive
Energy-saving, speed-controllable EC external rotor motor in protection category IP44 a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

Description RR EC

Casing
Made of galvanised steel sheet, robust for harsh operating conditions. Inlet and outlet side connection dimensions correspond to standard duct Ø.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic, made of galvanised steel sheet for RR EC 315 B impeller. Dynamically balanced together with motor for low-noise operation, high level of efficiency.

Protection category
Protection category IP54 through inlet and outlet-side installation in a duct system which prevents the ingress of rainwater.

Description SVR EC

Casing
Flat casing in compact design made of galvanised steel sheet. Connectors and lip seal on inlet and outlet side for standard duct Ø.
The retractable motor-impeller unit allows inspection and cleaning without dismantling components. The swivelling range must be considered for the inspection opening.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) on external cable.

Impeller
Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic. Dynamically balanced together with motor for low-noise operation.

Protection category
IP44 with connected duct system.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power.


The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Type RR EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
RR EC 315 A	05788	315	1910	2370	47	0.22	1.69	979	60	4.8	**EUR EC**[1)2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735
RR EC 315 B	06123	315	2140	2880	48	0.32	2.46	979	60	7.6	**EUR EC**[1)2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735
Type SVR EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
SVR EC 315 A	02669	315	1700	2570	52	0.21	1.65	979	60	13.6	**EUR EC**[1)2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735
SVR EC 315 B[3)]	00668	315	1940	2890	54	0.32	2.45	979	60	14.8	**EUR EC**[1)2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.
[3)] Performance diagram at www.HeliosSelect.de

Performance curves RR EC 315 A


Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	55	33	43	50	50	50	42	35
L_{WA}	Inlet side	dB(A)	74	62	66	66	66	68	64	64
L_{WA}	Outlet side	dB(A)	75	59	63	70	68	70	64	61

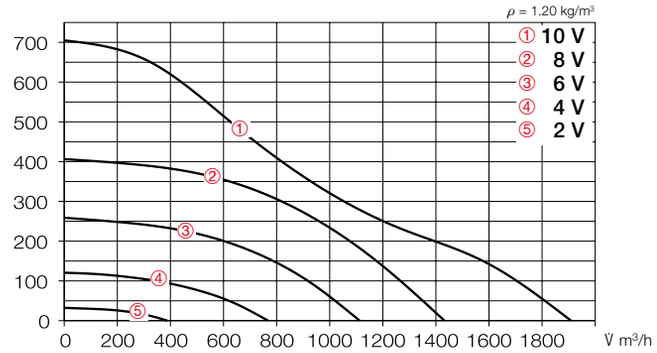

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2780	1910	190	1.5	47	0.36
8	2110	1430	90	0.72	45	0.23
6	1670	1110	50	0.40	40	0.16
4	1140	770	20	0.20	32	0.09

Performance curves RR EC 315 B


Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	56	41	44	49	48	52	45	36
L_{WA}	Inlet side	dB(A)	79	60	67	69	68	74	71	71
L_{WA}	Outlet side	dB(A)	81	61	68	75	73	76	70	69

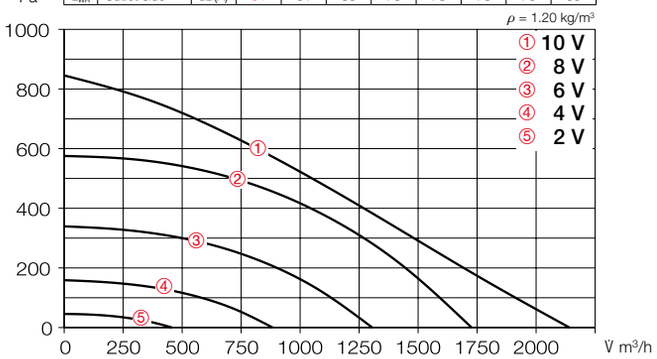

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3130	2140	240	1.8	48	0.40
8	2560	1730	140	1.1	46	0.29
6	1950	1310	65	0.53	40	0.17
4	1310	880	25	0.23	34	0.10

Performance curves SVR EC 315 A


Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	43	51	56	52	50	47	38
L_{WA}	Inlet side	dB(A)	75	62	67	70	68	67	66	62
L_{WA}	Outlet side	dB(A)	79	64	68	75	69	72	68	63

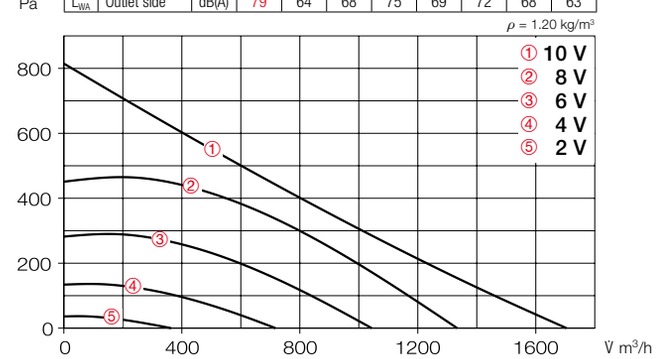

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
110	2680	1700	205	1.6	52	0.43
8	2120	1330	105	0.90	50	0.28
6	1670	1040	55	0.46	43	0.19
4	1150	720	25	0.20	36	0.12

Accessories

Pipe clamp connectors
BM 315 Ref. no. 05080
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs). Mount ventilation duct and fan connector at a distance and fold sleeve over during installation.




Mounting bracket
MK 4 Ref. no. 05824
Made of galvanised steel sheet.



External wall shutter
VK 315 Ref. no. 00760
Automatic made of plastic, light grey.

External wall cover grille
RAG 315 Ref. no. 00752
Made of plastic, light grey.





Protection grille
SGR 315 Ref. no. 05068
For inlet and outlet side installation. Made of galvanised steel.



Duct shutter
RSK 315 Ref. no. 05674
Automatic, made of metal.



Flexible cross talk silencer
FSD 315 Ref. no. 00681
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.



Air filter box
LFBR 315 Coarse 70%* 08581
LFBR 315 ePM1 50%* 08535
Air filter with large surface area, for installation in pipeline.



Electric heating element
EHR-R 6/315 6.0 kW No.08713
– with integrated temp. control
EHR-R 6/315 TR 6.0 kW No.05301
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002



Warm water heating element
WHR 315 Ref. no. 09484
Compact heat exchanger for installation in duct system.



Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 486 for detailed description.