
MV EC 250



MV EC 315




Dimensions MV EC 250



Dim. in mm


Dimensions MV EC 315



Dim. in mm

Performance curves MV EC 250


Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Radiation	dB(A)	61	38	49	55	55	56	44	33
L_{WA} Inlet side	dB(A)	74	50	63	68	69	70	58	47
L_{WA} Outlet side	dB(A)	76	52	65	70	69	73	60	45

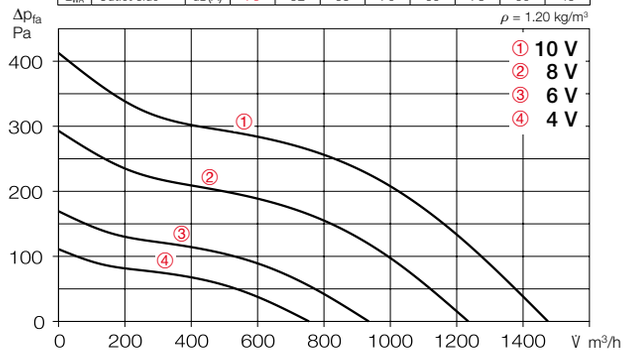

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2690	1470	124	1.00	53	0.30
8	2250	1230	73	0.61	49	0.21
6	1720	930	34	0.28	43	0.13
4	1390	750	20	0.17	39	0.10

Performance curves MV EC 315

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Radiation	dB(A)	65	39	50	60	61	55	55	36
L_{WA} Inlet side	dB(A)	78	52	63	73	75	69	69	50
L_{WA} Outlet side	dB(A)	81	56	66	77	77	73	67	50

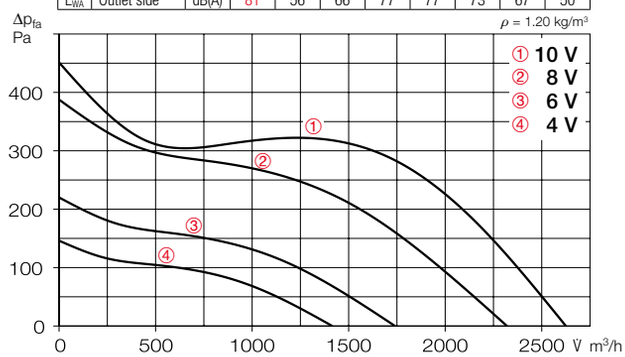

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2370	2620	234	1.75	57	0.32
8	2130	2320	166	1.32	55	0.26
6	1600	1740	76	0.63	48	0.16
4	1300	1410	45	0.37	44	0.11

Energy-saving EC round duct fan with high pressure performance, high volume output and space-saving dimensions.

Specifically designed for direct insertion in duct systems. Various applications in commercial, industrial and residential areas.

Description

Casing
The fan unit can be removed from the duct casing with integrated mounting bracket by loosening the clamp. All components are made of impact-resistant and corrosion-resistant plastic. Colour: Light grey.

Impeller
Optimised for high pressure performance and volume output, made of high-quality plastic. Dynamically balanced for low-noise operation.

Drive
Energy-saving, speed-controllable EC external rotor motor with high efficiency. Maintenance-free and ball bearing mounted.

Electrical connection
Spacious terminal box (IP44) on outside of casing; can be rotated into any position.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Power control
Continuously variable speed control via internal (delivery) or external potentiometer or continuously variable speed regulation with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power.
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Accessory details	**Page**
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP45																
MV EC 250	06035	250	1470	2740	53	0.126	1.00	1194	50	5.3	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
MV EC 315	06036	315	2620	2350	57	0.268	1.86	1195	50	9.5	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.